


APPLICATION

Console with 2 EPI anchors for davimast: the console with 2 EPI anchors is attached to the davimast. The 2 anchor points are tested to connect two operators of 150kg each. They can also be used to fix a TEMPO 3 lifeline between two davimast anchor points

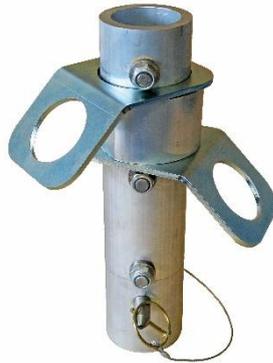

TECHNICAL CHARACTERISTICS

the davimast console with 2 360 ° rotating anchors is made of aluminum with two galvanized steel anchors. It is fixed at the top of the davimast with a pin and a clip pin attached to the console with a cable.

DESIGNATION	HT	LG	mats Ø	Weight
Console with 2 rotatif anchor for davimast 360°	345mm	250mm	80mm	4.4kg
davimast mast	1150mm		105mm	9.7kg

DESCRIPTION

The installation of the davimast console with 2 360 ° rotating anchors allows 2 operators to work freely around an anchoring point. Its high position reduces the fall distance and makes the use of the fall arrest system more comfortable. Each anchor point is tested for the anchoring of a 150kg operator equipped with his tools. Each anchor point has been tested to a resistance of 1500daN which allows operators to fix a tempo 3 lifeline between two anchorages 18m apart to secure 3 operators simultaneously.

NORMS

It complies with:

- **EN795/A** : for the PPE anchorage on the davimast console
- **TS16415** : Multi user of 150 kg

CODES

Product Description	Code
davimast mast	210188
Console with 2 rotatif anchor for davimast 360°	210198